

Coaxial SPD



HF – 4GHz



- SPDcoaxial 4 GHz
- Low insertion loss
- Waterproof IP65
- Specific gas discharge tube removable
- DC-pass
- Two-way

Specifications

Designation	Coaxial – 25W	Coaxial – 190W	Coaxial – 780W
Part #	P8613	P8612C	P8614
Fréquency	DC – 4 GHz	DC – 4 GHz	DC – 4 GHz
Insertion loss	< 0.2 dB	< 0.2 dB	< 0.2 dB
Return Loss	> 20 dB	> 20 dB	> 20 dB
Stationary wave rate	< 1.2 : 1	< 1.2 : 1	< 1.2 : 1
Discharge current (8/20 µs)	20kA	20kA	20kA
Protection level Up	< 600V	< 600V	< 1000V
Power max.	25W	190W	780W
Current max.	10A	10A	10A
Impedance	50 ohms	50 ohms	50 ohms
Connection	Serie (two-way)		
Mechanical characteristics			
Connection to network	N, BNC, F, TNC, SMA, 7/16		
Ground connection	Feedthrough, M6 screw lug		
Ingress Protection	IP65		
Operating Temperature	-40°C à +85°C		

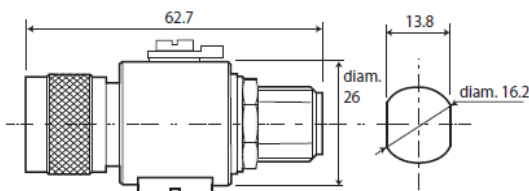

GDT: Gas Discharge Tube

DOC254a.VEN-Rev0

