


3m or 6m FAA Compliant Windsock Mast

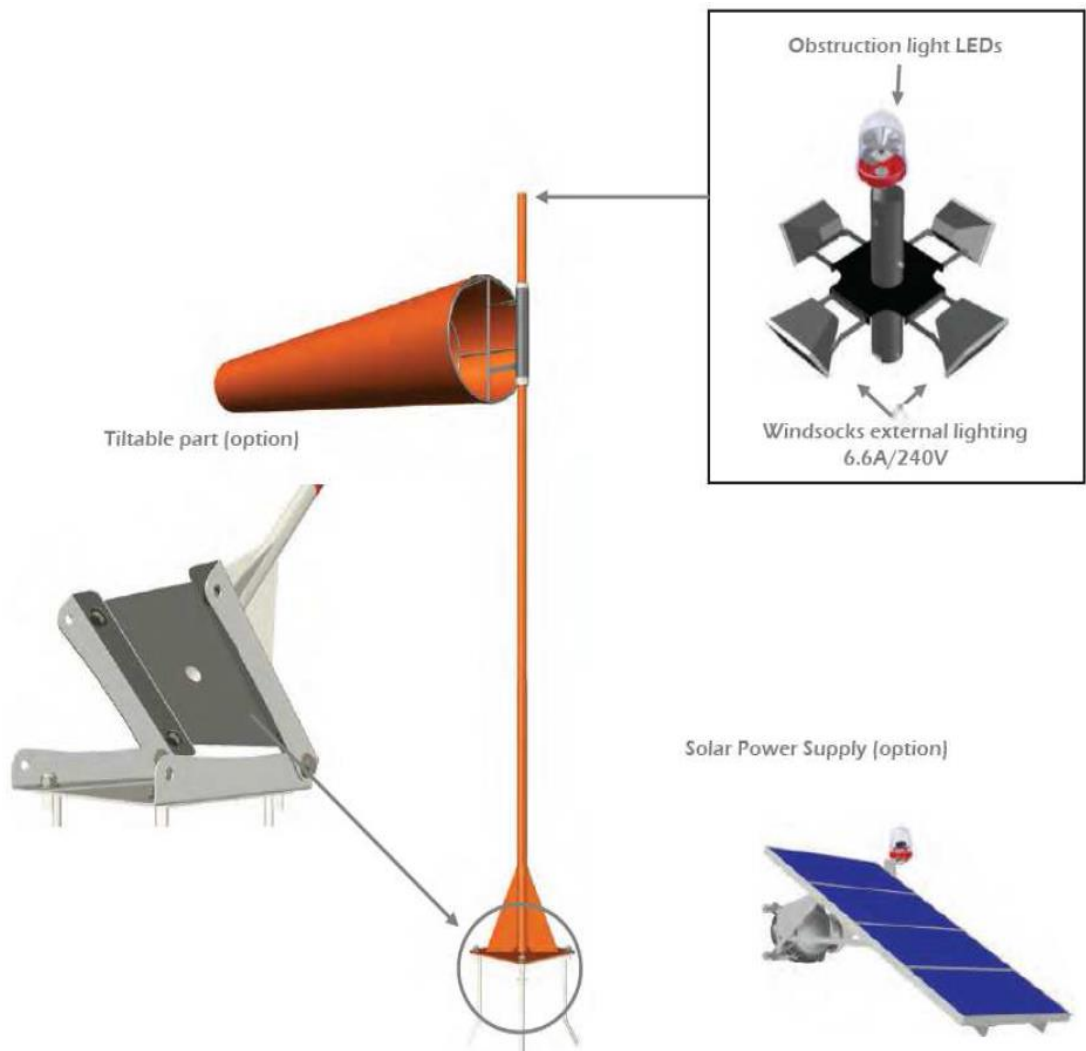

Description:

Our FAA mast is compliant with FAA rules.

This mast is available in 3 or 6 meters and is provided with preformed wind vane.

In option, the mast could be painted in white or red.

Several options are available as windsocks, external lighting and top mast beaconing.

Models


Model	Win vane diameter	3 meters	6 meters
FAA3-30-G	30 cm	X	
FAA3-60-G	60 cm	X	
FAA3-90-G	90 cm	X	
FAA3-100-G	100 cm	X	
FAA6T-30-G	30 cm		X
FAA6T-60-G	60 cm		X
FAA6T-90-G	90 cm		X
FAA6T-100-G	100 cm		X

FAA Compliant Windsock Mast


Characteristics

Mechanicals	
Height	3 or 6 meters
Tiltable part	In option for 3 meters
Protection	Galvanized steel
Paint	No paint
Fixation	Concrete block
Wind vane	30 / 60 / 90 / 100 cm
Braces	No
Concrete block	600 x 600 x 800 mm
Environment	
Humidity	100%
Frost	-60°C
Wind speed	240 Km/h
Certifications	
FAA	Compliant
Quality	ISO 9001 ; 2008
Warranty	
	1 year
Options	
	Specific plate for tiltable part
	Top mast beaconing
	Windsock external lighting with 4 halogen (240V or 6.6A)
	Painting
	Frangibility of the mast
	Solar power supply

Dimensions :

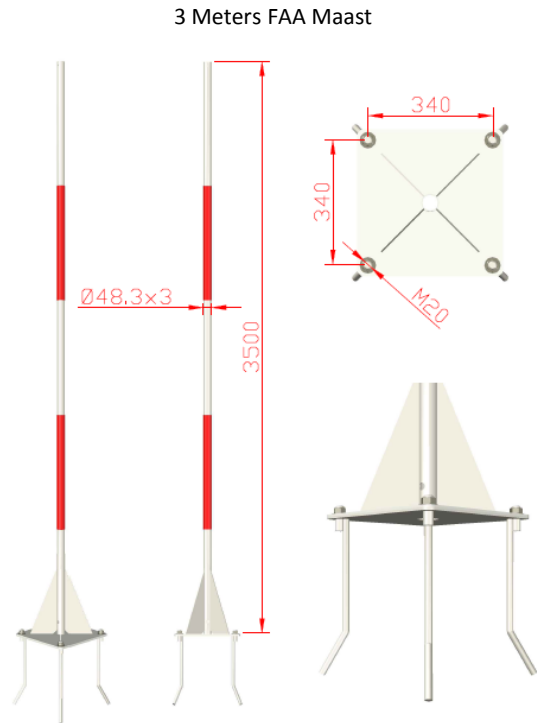

6 Meters FAA mast

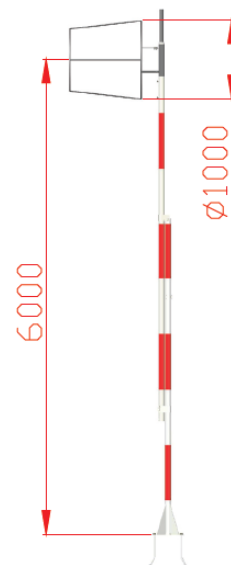

Characteristics option top mast beaconing :

Luminous	
Luminous source	LEDs
Colour	Red
Horizontal beau	360°
Vertical beau	10°
Luminous intensity	>10 Cd
MTBF	100 000 Hours
Electrics	
Voltage	6.6A/230V/12V (solar)
Lightning protection	Integrated
Functioning temperature	-55°C up to +55°C
Consumption	<3 Watts
Protection class	IP66

Available accessories for installation

- Windsock
- Solar kit