


Medium Intensity LED - LMIAC Type A&C

– White Flash and night Steady Red beconing

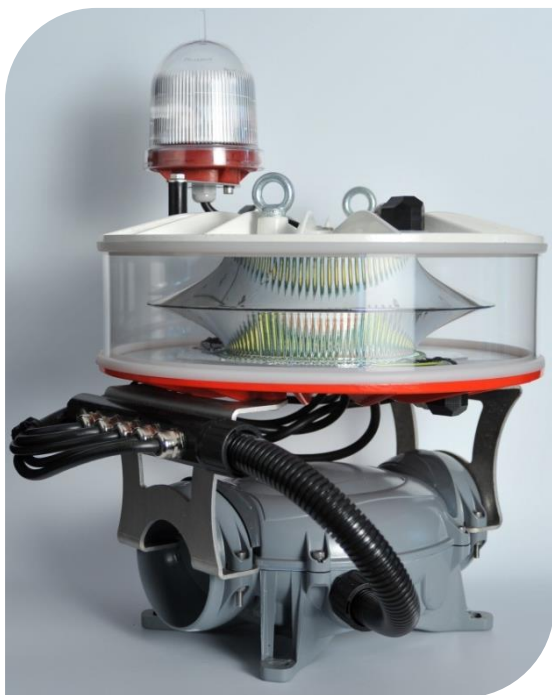

Description:

The LMIAC is a medium intensity light with multi-LEDs technology. Dedicated to a day and night white flash beaconing, it is a long life system (100 000 Hours), very strong with a low consumption (90w).

Photocell and dry contact can be provided either in the light or deported in a system of control (Safety power supply, control panel).

Moreover, it can be solar power supplied.

It has been designed for an easy installation.


Advantages :

- Wired synchronization integrated, optical fiber, GPS and TCPIP available
- Long life time > 10 years
- Multi – LEDs
- Low consumption < 90W
- Lightning protection
- Delta Box exclusive self test included with photocell
- No maintenance
- 2 years warranty
- Zamac box with epoxy powder painting
- Connection plug IP68, in option

Regulations:

- OACI, STAC N° 2010A022/2013A045
- CE
- FAA Compliant L864/L-865

Scope of application:

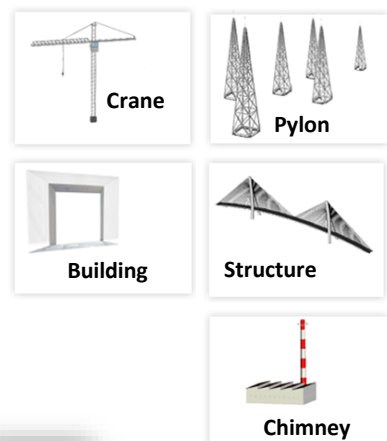

Applications :

Rules concerning aircraft beaconing are established by the ICAO

Medium intensity lights can be installed on structures up to 150 meters high. Beyond 90 meters, it is necessary to plan several levels of lights.

According to the rules, an uninterruptible power supply cabinet has to be installed to assure a 12 hour beaconing in case of power supply failure.

Models

Model	Voltage	Photocell	Dry contact
LMIAC00BB*	48V DC	Not included	Not included
LMIAC11BB	48V DC	Included	Included
LMIAC00MB*	110-240V AC	Not included	Not included
LMIAC11MB	110-240V AC	Included	Included

*to installed with Safebox or solar power supply or GPS

DOC118a.VEN-Rev1



Medium Intensity LED - LMIAC Type A&C

– White Flash and night Steady Red beconing

Characteristics



Luminous	
Luminous source	LEDs
Colour	White flash (Day) Red flash (Night)
Horizontal beam	360°
Vertical beam	3°
Luminous intensity	20 000 Cd (Day, white) 2 000 Cd (Night, red)
Flash frequency	20 to 60 fpm
MTBF	100 000 Hours
Electrics	
Voltage	48V DC / 110-240V AC
Lightning protection	Integrated
Functioning temperature	-55°C to +55°C
Consumption	<50 Watts @ 20 fpm
Current I _{max} (day mode)	To 48V : I=4400mA To 230V : I=1000mA
Current I _{max} (night mode)	To 48V : I=1400mA To 230V : I=350mA
Protection class	IP66
Mechanics	
Box material	Zamac
Body lamp material	Aluminium
Lens material	Polycarbonate
Mounting	M8 screw
Height	410mm
Width	410mm
Weight	18 Kg
Environment	
Humidity	100%
Gel	-60°C
Wind speed	240 Km/h
Certifications	
CE	EN60947-1 CEI60364, NF C15-100 EN60529
ICAO	Annexe 14, Volume I, Chapter 6
FAA	Compliant L-865 / L-864
Quality	ISO 9001 ; 2008
Warranty	2 years
Options	Photocell Dry contact for failure alarm

*as per installation conditions



Available accessories for installation

- Power supply
- UPS system
- Solar kit


Dimensions :




SCREW LENGTH	
Ø :	L :
Ø40	50
Ø60	70
Ø80	90
Ø100	110
Ø120	130



Drilling



Wiring

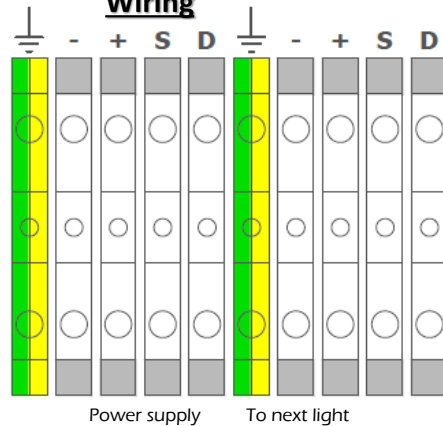

Power supply

To next light