

Stainless Steel Elevation Mast

Reference	P2015	P2016	P2017	P2018	P2020
Designation	Elevation Mast 1 st element	Elevation Mast 1 st element with clamp	Elevation Mast 2 nd element	Elevation Mast 3 rd element	Elevation Mast 1 st element with clamp
Length (m)	2.00	2.00	2.00	2.00	1.00
Diameter (mm)	30	30	33.7	42.4	30
Weight (kg)	2.7	2.8	4.0	5.0	1.55
Material	Stainless Steel – 304L				
Connection	Thread M20	Thread M20	Necked tube Ø25,2m m	Necked tube Ø28mm	Thread M20

Made of 304L stainless steel, Indelec's elevation poles enable the lightning rod (PREVECTRON® E.S.E., Indelec multiple rod or Pointed Air Rod) to be raised by up to 6 m without resorting to guy wires.

The telescopic sections are fixed together by male-female fitting.

The lightning rod is screwed (M20 thread) at the top of the first section (P2015, 2016 or P2020).


Detail 1
Upper termination
P2015, P2016, P2020



Detail 2
Included Clamp
P2016, P2020



Necked tube
P2017 & P2018

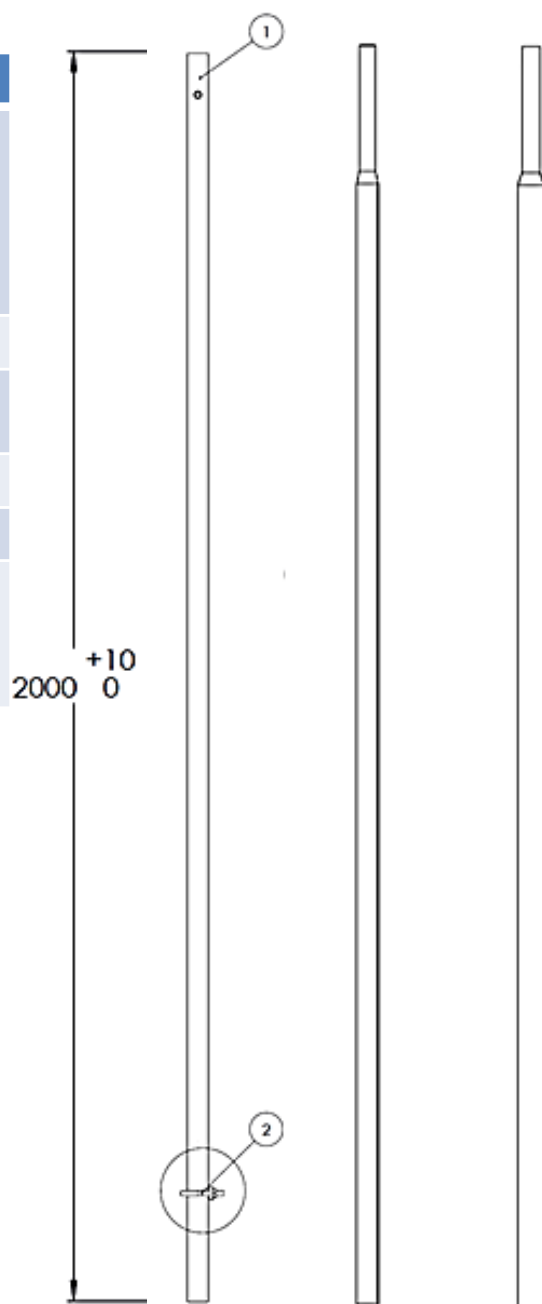

Assembly	
Mast 3.80m	P2015 or 2016 + P2017
Mast 5.50m	P2015 or 2016 + P2017 + 2018