


Flexible Conductors

COPPER BRAID

Standard EN 62561-2


Ref.	Dimensions (X x Y) mm	Section mm ²	Material	Weight by meter (kg)	Length
P5021	30 x 3,5	50	Tinned copper	0.470	25m Coil
P5025	16 x 2	16	Tinned copper	0.144	50m Coil



CABLE


Standard EN 62561-2

Ref.	Section mm ²	Material	Weight by meter (kg)	Length
C836	50	Raw copper	0.420	Coil 50m



FLEXIBLE COPPER EARTH BRAID

Standard EN 62561-2

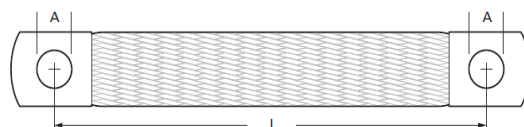

Ref.	Section mm ²	Length (L) mm	Ø eyelet (A) mm	Material	Weight (kg)
P5022	50	300	10,5	Tinned copper	0.185
P5023	50	500	10,5	Tinned copper	0.290
P5024	50	1000	10,5	Tinned copper	0.520

DOC191a.VEN-Rev0

